ATS 2000 Vortex P8 750 Tandem Submersible Lube Free Sump Pump




The NEW VORTEX P8 with Tandem Motors pump gives double the water pressure, thus resulting in doubling the head over any standard pump. It is environmentally friendly with world class leading lubrication free pneumatic motor and rust-free technology.

Specifically developed to operate under severe mining conditions, like deep excavations and winces. With exceptional features; low air consumption lightweight and easy to carry. A combination of toughness, durability, versatility and benefits never seen before.



MODEL No.	SKU	Description
P8-50-750-HP TANDEM	ATSP850750HP	Tandem Vortex High Pressure Sump Pump with STD Cast Iron Involute Housing and Impeller

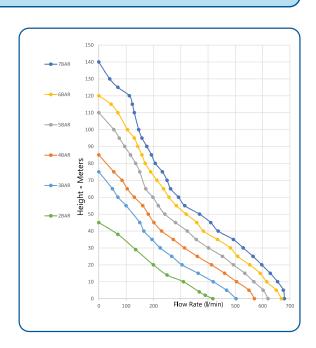

Specifications			
Noise Level	85Dba @ 1m		
Overall Height	435 mm		
Overall Width	340 mm		
Weight	45 Kg		
Power Rating	8 Kw		
Working Pressure	100-700 kPa		
Air Inlet	1" BSP		
Air Outlet	32mm		
Water Outlet	2" BSP		
Swage Nipple Outlet	50 mm		
Air Consumption @ 6 bar	90 cfm		
Max Head @ 700 Kpa	140 m		
Max Flow Rate @ 700 Kpa	764 L/min		
Max Head @ 400 Kpa	85 m		
Max Flow Rate @ 400 Kpa	674 L/min		

Contact Your Local Dowdens Account Manager

MACKAY (Head Office)

9-15 Industrial St, Mackay Qld 4740 Phone: 07 4969 4949 Fax: 07 4969 4900 info@dowdens.com.au

ROCKHAMPTON

4/415 Yaamba Rd, Rockhampton Qld 4701 Phone: 07 4923 6969 Fax: 07 4923 6900 info@dowdens.com.au

BRISBAN

45 Fulcrum St, Richlands Qld 4077 Phone: 07 3828 7000 Fax: 07 3828 7055 brisbane@dowdens.com.au

PROSERPINE


2 Mann St, Proserpine Qld 4800 Phone 07 4969 4940 Fax 07 4969 4900 info@dowdens.com.au



ATS 2000 Vortex P8 750 Tandem Submersible Lube Free Sump Pump



FEATURE		BENEFIT
1	Pumping Section	
1.1	Inverted Volute Chamber & Impeller with Side Suction	Pump is placed on top of dirt not in it. No need for water filtering screen. What it swallows it will pump.
1.2	Vortex Pumping	Ability to pump grit, fibers and small stones, without jamming.
1.3	Inverted Impeller & Volute are made of SG42 Cast Iron	Allows for flood feed through the sides, no suction required and hard wearing.
1.4	Detachable Impeller cover with "0" ring seal.	Three 17mm bolts remove "O" ring cover gaining quick access to the impeller for cleaning.
1.5	Optional High Volume non-return valve.	Helps to keep dirt out of the pump when it stops pumping.
1.6	Ability to lift the pump out of the water while running.	Pump will maintain water pressure when lifted out of the water allowing transfer to the pump position with little back flow.
2	Motor Section	
2.1	Environmentally Friendly Lubrication-free motor.	Motor can be run continuously without oil, eliminating environmental oil polution and has an extended motor life.
2.2	Stainless steel Cylinder and hardened & Rust-free motor parts.	Rust free and highly wear resistant.
2.3	An Inverted Impeller allows no high pressure water on the spindle seals.	Spindle seals control low exhaust air pressure in the motor housing from entering the pump volute. There is no high pressure water being controlled.
2.4	Ability to run continuously out of the water.	Motor housing seal is cooled by air passing through the motor into the exhaust.
2.5	SG42 Cast iron Body.	Very tough and durable.
2.6	Ergonomically designed carry handle.	Easy to carry and is also the exhaust housing.
3	Filter Inlet Section	
3.1	Built in high capacity in line micro filtering system with flushable and replaceable filter element.	Day to day element cleaning is easy and accessible and replacing is via external screw cap.

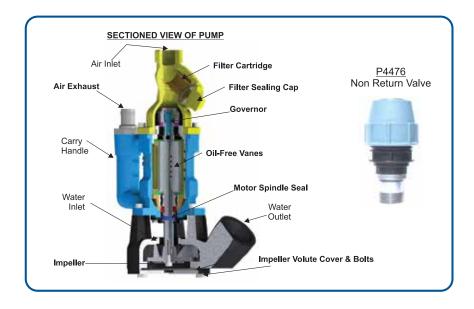



Contact Your Local Dowdens Account Manager

MACKAY (Head Office)

9-15 Industrial St, Mackay Qld 4740 Phone: 07 4969 4949 Fax: 07 4969 4900 info@dowdens.com.au

ROCKHAMPTON

4/415 Yaamba Rd, Rockhampton Qld 4701 Phone: 07 4923 6969 Fax: 07 4923 6900 info@dowdens.com.au

BRISBANE

45 Fulcrum St, Richlands Qld 4077 Phone: 07 3828 7000 Fax: 07 3828 7055 brisbane@dowdens.com.au

PROSERPINE

2 Mann St, Proserpine Qld 4800 Phone 07 4969 4940 Fax 07 4969 4900 info@dowdens.com.au

