

Electric Pressure Control Deluge Valve with Local Reset

Model FP 400E - 2MC


The BERMAD model 400E-2MC is an elastomeric, hydraulic line pressure operated deluge valve. Designed specifically for advanced fire protection systems and the latest industry standards.

The 400E-2MC is activated by a 3-Way solenoid valve, that actuates a latching relay valve opening the main valve. Once open, the valve will not close until locally reset.

An integral pressure reducing pilot ensures a stable and precise preset downstream system water pressure.

The optional valve position indicator can include a limit switch suitable for Fire & Gas monitoring systems.

The 400E-2MC is ideal for open-nozzle systems with a high pressure water supply and is available with electric components to suit any hazardous location.

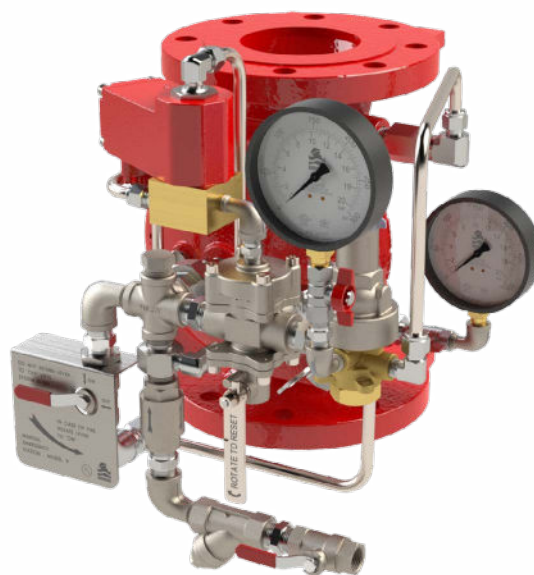

(for Illustration Only)

Benefits and Features

■ Safety and reliability

- Time proven, simple design, fail-safe actuation
- Single piece, rugged elastomeric diaphragm seal - VRSD technology
- Obstacle-free, uninterrupted flow path
- No mechanical moving parts
- 3-Way Solenoid Valve, UL429A Listed
- Latches open: remains open until reset locally
- Ensures precise, stable downstream water pressure

■ Quick and easy maintenance

- Designed for high reliability and easy maintenance
- In-line serviceable
- Fast and easy cover removal

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 10"



Det Norske Veritas
Type Approval



ABS
American Bureau of Shipping
Type Approval




Lloyd's Register
Type Approval

Typical Applications

- Electric fire detection systems with control panels
- Automatic water spray
- Foam applications
- High pressure water supply


Additional Features

- Valve position limit switches
- Alarm pressure switch
- Seawater compatibility




Operation

(for Illustration Only)

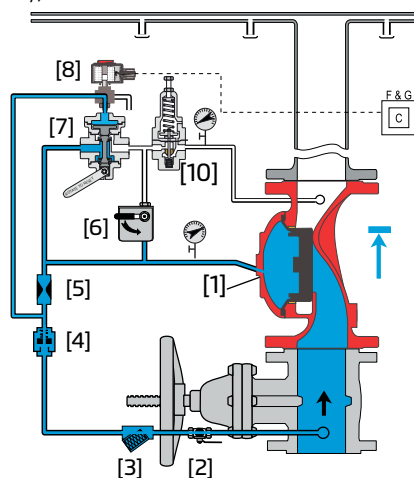

Valve Closed (normal conditions)

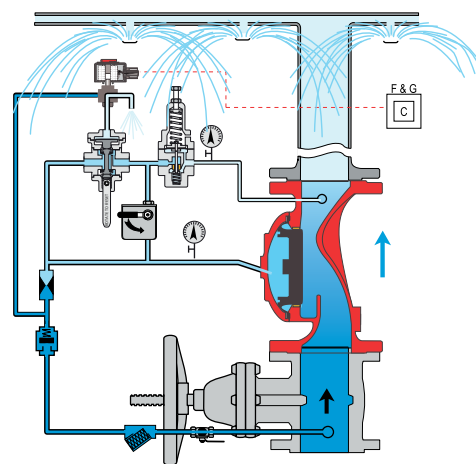

Valve Open (fire conditions)


The BERMAD model 400E-2MC is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] strainer [3] and restriction orifice [5] it is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (URV-M) [7] that is held closed by water pressure supplied through a three-way solenoid valve [8]. The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the URV-M opening in response to the solenoid valve being activated by the fire & gas control system [C]. This latches the 400E-2MC deluge valve open, allowing water to flow into the system piping and to the alarm device.

The pressure-reducing pilot valve [10] senses changes in outlet pressure and, modulates the main valve to maintain the set downstream pressure. When outlet pressure rises above the setting of the pilot spring force, the pilot valve throttles, enabling pressure to accumulate in the control chamber, this causes the main valve to close further and reduce outlet pressure to the set pressure. When outlet pressure falls, the pilot valve opens wider, releasing pressure from the control chamber. This causes the main valve to immediately open wider and increase outlet pressure to maintain the set pressure.

System P&ID

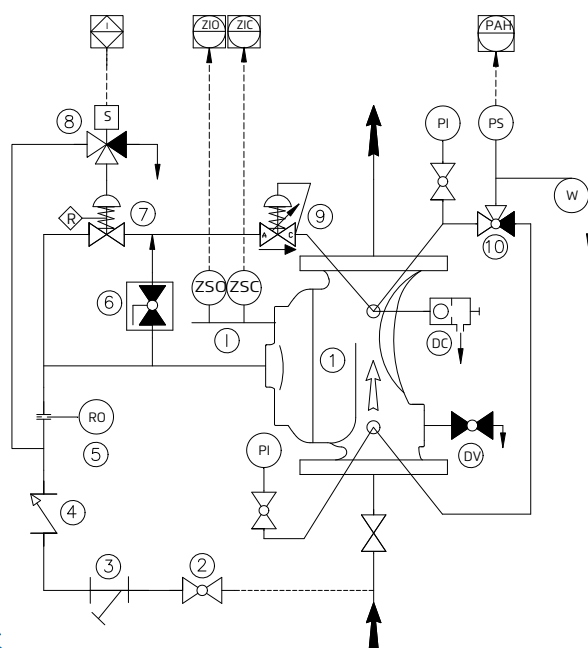


Components

- 1 BERMAD 400E Deluge Valve
- 2 Priming Ball Valve
- 3 Priming Strainer
- 4 Check valve
- 5 Restriction Orifice
- 6 Manual Emergency Release
- 7 URV-3-M Relay Valve
- 8 3-Way NO Solenoid Valve
- 9 Pressure reducing pilot valve

Optional System Items

- ZS Limit Switch Assembly
- I Visual Indicator
- DC Automatic Drip Check Valve*
- DV Drain Valve*
- PI Pressure Indicator*
- PS Pressure Switch
- W Water Motor Alarm
- 10 3-Way Alarm Valve*

* Included with suffix A in valve code (drain and indicating components)
See code designations and additional Factory Fitted Options on page 4



System Installation

A typical installation of the BERMAD model 400E-2MC features automatic actuation via a universal relay valve and a three-way solenoid valve, triggered by a signal from a fire & gas control system or an on-site emergency pushbutton. A pressure reducing pilot within the control trim, ensures a precise and stable set downstream pressure. When fitted with a limit switch the valve can send a feedback signal to a remote valve position monitoring system.

Optional System Items



Limit switch



Water Motor Alarm




Pressure Switch



Pressure Gauges



Strainer

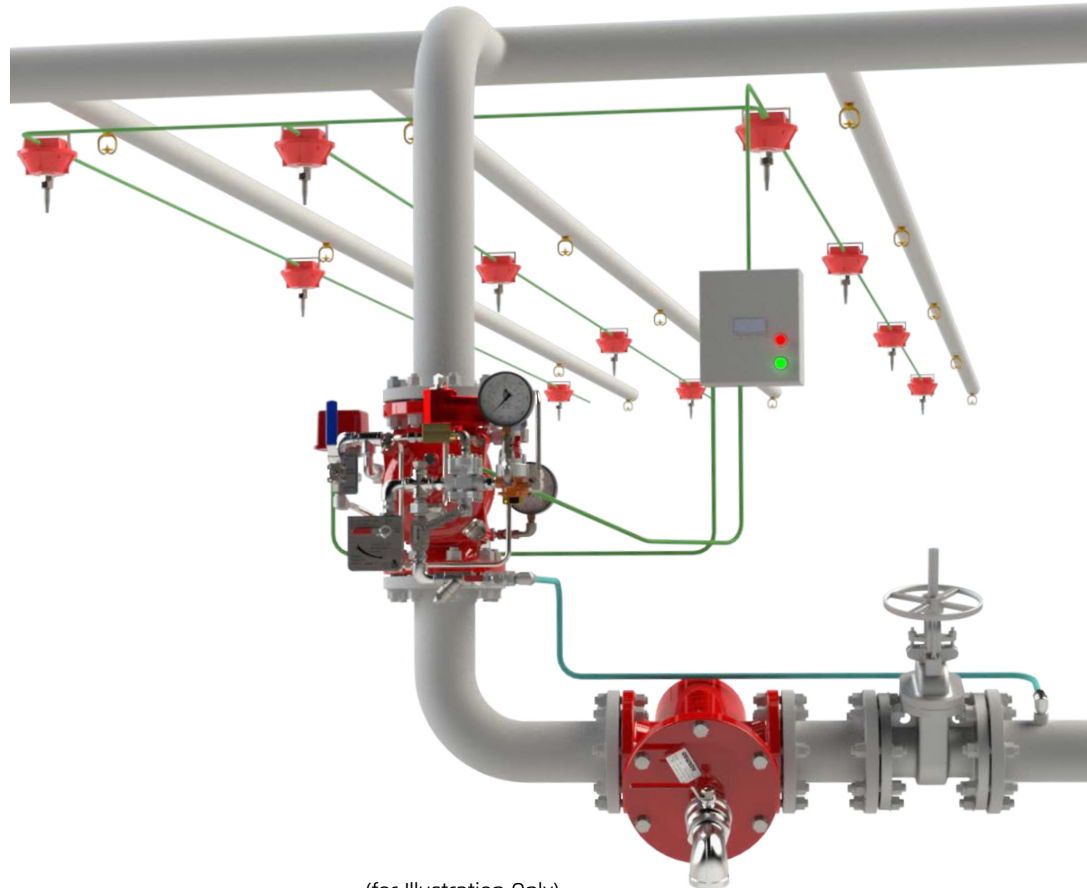

(for Illustration Only)

Suggested Specifications

The deluge valve shall be UL-listedg.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

Valve actuation shall be accomplished by a single-piece, rolling diaphragm bonded with a rugged radial seal disk.

The diaphragm assembly shall be the only moving part.


The deluge valve shall include a 3-Way latching relay pilot valve, a 3-Way solenoid valve UL429A Listed for 25 bar/365 psi working pressure with a tolerance of 35% below of the rated voltage, a Y-type strainer, a ball drain valve, an automatic drip-check with manual override, 4-inch pressure gauges, and a manual emergency release housed in a stainless 316 stainless box.

Removing the valve cover for inspection and maintenance shall be in-line.

The deluge valve and its entire control trim shall be supplied pre-assembled and hydraulically tested in compliance to the UL 260 standard, by a factory certified to ISO 9000 and 9001 quality assurance standards.

BERMAD Fire Protection

Model FP 400E - 2MC



400E Series

Technical Data

Available Sizes (inch)


- Flanged - 1½, 2, 3, 4, 6, 8, 10 & 12"
- Grooved - 2, 3, 4, 6 & 8"
- Threaded - 1½ & 2"

Pressure Rating

- 17.2 bar / 250 psi

Elastomer

- HTNR - Fabric Reinforced High Temperature Compound - See engineering data

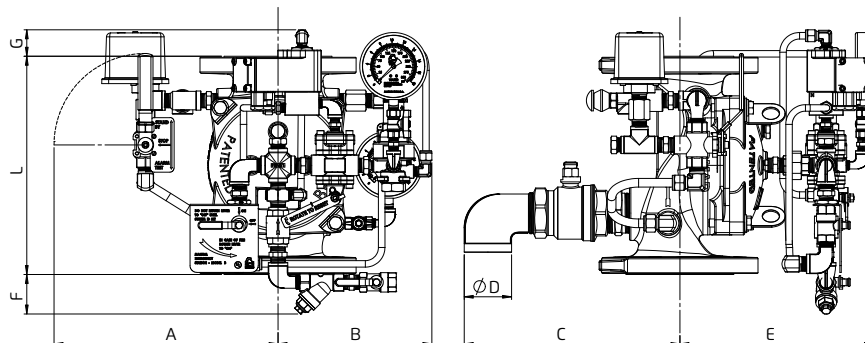

Valve Size	1½" DN40		2" DN50		2½" DN65		3" DN80		4" DN100		6" DN150		8" DN200		10" DN250		12" DN300	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L #150	205	8.1	205	8.1	205	8.1	257	10.1	320	12.6	415	16.3	500	19.7	605	23.8	725	28.5
A	284	11.2	284	11.2	295	11.6	317	12.5	329	13.0	358	14.1	374	14.7	394	15.5	439	17.3
B	223	8.8	223	8.8	223	8.8	223	8.8	223	8.8	223	8.8	223	8.8	223	8.8	223	8.8
C	282	11.1	282	11.1	287	11.3	302	11.9	316	12.4	337	13.3	364	14.3	372	14.6	420	16.5
ØD	¾"		¾"		1½"		1½"		2"		2"		2"		2"		2"	
E	214	8.4	214	8.4	226	8.9	250	9.8	270	10.6	345	13.6	396	15.6	396	15.6	513	20.2
F	108	4.3	108	4.3	108	4.3	83	3.3	51	2.0	3	0.1	-39	-1.5	-93	-3.7	-152	-6.0
G	95	3.7	95	3.7	95	3.7	70	2.8	38	1.5	-10	-0.4	-52	-2.0	-106	-4.2	-165	-6.5
Kg / lb	14 / 31		15 / 33		17 / 37		25 / 55		34 / 75		74 / 163		131 / 289		146 / 322		227 / 500	

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning; - allow a tolerance of at least ±10%.

Valve Code Designations

FP	6"	400E-2MC	V	C	A5	ER	4DC	NN	N9W																																																																																																																																									
<table><tr><th>Category</th><th>Code</th></tr><tr><td>Standard</td><td>FP</td></tr><tr><td>Seawater</td><td>FS</td></tr><tr><td>Foam Concentrate</td><td>FC</td></tr></table>	Category	Code	Standard	FP	Seawater	FS	Foam Concentrate	FC	<table><tr><th>Valve Size</th><td></td></tr><tr><td>1½"</td><td>40 mm</td></tr><tr><td>2"</td><td>50 mm</td></tr><tr><td>3"</td><td>80 mm</td></tr><tr><td>4"</td><td>100 mm</td></tr><tr><td>6"</td><td>150 mm</td></tr><tr><td>8"</td><td>200 mm</td></tr><tr><td>10"</td><td>250 mm</td></tr><tr><td>12"</td><td>300 mm</td></tr></table>	Valve Size		1½"	40 mm	2"	50 mm	3"	80 mm	4"	100 mm	6"	150 mm	8"	200 mm	10"	250 mm	12"	300 mm	<table><tr><th>Installation</th><th>Code</th></tr><tr><td>Vertical</td><td>V</td></tr><tr><td>Horizontal</td><td>H</td></tr></table>	Installation	Code	Vertical	V	Horizontal	H	<table><tr><th>Material Body & Cover⁽¹⁾</th><th>Code</th></tr><tr><td>Ductile Iron A536⁽²⁾</td><td>C</td></tr><tr><td>Steel ASTM A216 WCB⁽²⁾</td><td>S</td></tr><tr><td>Stainless Steel 316</td><td>N</td></tr><tr><td>Nickel Al Bronze C95800</td><td>U</td></tr><tr><td>Super Duplex Grade 5A</td><td>D</td></tr></table>	Material Body & Cover ⁽¹⁾	Code	Ductile Iron A536 ⁽²⁾	C	Steel ASTM A216 WCB ⁽²⁾	S	Stainless Steel 316	N	Nickel Al Bronze C95800	U	Super Duplex Grade 5A	D	<table><tr><th>End Connections</th><th>Code</th></tr><tr><td>ANSI#150RF</td><td>A5</td></tr><tr><td>ANSI#150FF</td><td>a5</td></tr><tr><td>ISO PN16</td><td>16</td></tr><tr><td>Grooved ANSI C606</td><td>VI</td></tr></table>	End Connections	Code	ANSI#150RF	A5	ANSI#150FF	a5	ISO PN16	16	Grooved ANSI C606	VI	<table><tr><th>Coating⁽²⁾</th><th>Code</th></tr><tr><td>Polyester Red</td><td>PR</td></tr><tr><td>High Build Epoxy</td><td>ER</td></tr><tr><td>Uncoated</td><td>UC</td></tr></table>	Coating ⁽²⁾	Code	Polyester Red	PR	High Build Epoxy	ER	Uncoated	UC	<table><tr><th>Voltage - Main Valve N.O or N.C*</th><td></td></tr><tr><td>24VDC - N.C.</td><td>4DC</td></tr><tr><td>24VDC - N.O.</td><td>4DO</td></tr><tr><td>110VDC - N.C.</td><td>5DC</td></tr><tr><td>110VDC - N.O.</td><td>5DO</td></tr><tr><td>110-120/AC - N.C.</td><td>5AC</td></tr><tr><td>110-120/AC - N.O.</td><td>5AO</td></tr><tr><td>220-240/AC - N.C.</td><td>2AC</td></tr><tr><td>220-240/AC - N.O.</td><td>2AO</td></tr></table>	Voltage - Main Valve N.O or N.C*		24VDC - N.C.	4DC	24VDC - N.O.	4DO	110VDC - N.C.	5DC	110VDC - N.O.	5DO	110-120/AC - N.C.	5AC	110-120/AC - N.O.	5AO	220-240/AC - N.C.	2AC	220-240/AC - N.O.	2AO	<table><tr><th>Factory Fitted Options</th><th>Code</th></tr><tr><td>General Purpose NEMA-4 Pressure Switch⁽³⁾</td><td>P</td></tr><tr><td>Ex Proof NEC, Div.1 Pressure Switch⁽³⁾</td><td>P7</td></tr><tr><td>Ex d ATEX Pressure Switch⁽³⁾</td><td>P9</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure⁽³⁾</td><td>P9Jn</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure, Monel Sensor⁽³⁾</td><td>P9mJn</td></tr><tr><td>Single Limit Switch, General Purpose</td><td>S</td></tr><tr><td>Single Ex d Proximity limit Switch</td><td>S9</td></tr><tr><td>Double Ex d Proximity Limit Switch</td><td>SS9</td></tr><tr><td>Double Ex d Proximity Limit Switch with SS316 Junction Box</td><td>SS9Jn</td></tr><tr><td>Pressure Gauge Assembly⁽³⁾</td><td>6</td></tr><tr><td>S.S Glycerin Pressure Gauge Assembly⁽³⁾</td><td>6n</td></tr><tr><td>Monel Pressure Gauge Assembly</td><td>6m</td></tr><tr><td>Ex Proof NEC Class 1 Div 1 Solenoid</td><td>7</td></tr><tr><td>Ex. d Atex Solenoid</td><td>9</td></tr><tr><td>Stainless steel 316 Solenoid Valve</td><td>K</td></tr><tr><td>Drain Valve</td><td>DV</td></tr><tr><td>Water Motor Alarm Assembly⁽³⁾</td><td>W</td></tr><tr><td>Special Elastomer</td><td>E⁽⁴⁾</td></tr><tr><td>Large Control Filter</td><td>F</td></tr><tr><td>Valve Position Indicator</td><td>I</td></tr><tr><td>S.S Solenoid Valve</td><td>K</td></tr><tr><td>S.S 316 Trim Accessories</td><td>N</td></tr><tr><td>Pressure Transmitter⁽³⁾</td><td>Q</td></tr><tr><td>Drain and Indicating Components</td><td>A</td></tr></table>	Factory Fitted Options	Code	General Purpose NEMA-4 Pressure Switch ⁽³⁾	P	Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7	Ex d ATEX Pressure Switch ⁽³⁾	P9	Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn	Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn	Single Limit Switch, General Purpose	S	Single Ex d Proximity limit Switch	S9	Double Ex d Proximity Limit Switch	SS9	Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn	Pressure Gauge Assembly ⁽³⁾	6	S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n	Monel Pressure Gauge Assembly	6m	Ex Proof NEC Class 1 Div 1 Solenoid	7	Ex. d Atex Solenoid	9	Stainless steel 316 Solenoid Valve	K	Drain Valve	DV	Water Motor Alarm Assembly ⁽³⁾	W	Special Elastomer	E ⁽⁴⁾	Large Control Filter	F	Valve Position Indicator	I	S.S Solenoid Valve	K	S.S 316 Trim Accessories	N	Pressure Transmitter ⁽³⁾	Q	Drain and Indicating Components	A	<table><tr><th>Tubing & Fittings</th><th>Code</th></tr><tr><td>Stainless Steel 316</td><td>NN</td></tr><tr><td>Monel 400</td><td>MM</td></tr><tr><td>Super Duplex</td><td>DD</td></tr></table>	Tubing & Fittings	Code	Stainless Steel 316	NN	Monel 400	MM	Super Duplex	DD
Category	Code																																																																																																																																																	
Standard	FP																																																																																																																																																	
Seawater	FS																																																																																																																																																	
Foam Concentrate	FC																																																																																																																																																	
Valve Size																																																																																																																																																		
1½"	40 mm																																																																																																																																																	
2"	50 mm																																																																																																																																																	
3"	80 mm																																																																																																																																																	
4"	100 mm																																																																																																																																																	
6"	150 mm																																																																																																																																																	
8"	200 mm																																																																																																																																																	
10"	250 mm																																																																																																																																																	
12"	300 mm																																																																																																																																																	
Installation	Code																																																																																																																																																	
Vertical	V																																																																																																																																																	
Horizontal	H																																																																																																																																																	
Material Body & Cover ⁽¹⁾	Code																																																																																																																																																	
Ductile Iron A536 ⁽²⁾	C																																																																																																																																																	
Steel ASTM A216 WCB ⁽²⁾	S																																																																																																																																																	
Stainless Steel 316	N																																																																																																																																																	
Nickel Al Bronze C95800	U																																																																																																																																																	
Super Duplex Grade 5A	D																																																																																																																																																	
End Connections	Code																																																																																																																																																	
ANSI#150RF	A5																																																																																																																																																	
ANSI#150FF	a5																																																																																																																																																	
ISO PN16	16																																																																																																																																																	
Grooved ANSI C606	VI																																																																																																																																																	
Coating ⁽²⁾	Code																																																																																																																																																	
Polyester Red	PR																																																																																																																																																	
High Build Epoxy	ER																																																																																																																																																	
Uncoated	UC																																																																																																																																																	
Voltage - Main Valve N.O or N.C*																																																																																																																																																		
24VDC - N.C.	4DC																																																																																																																																																	
24VDC - N.O.	4DO																																																																																																																																																	
110VDC - N.C.	5DC																																																																																																																																																	
110VDC - N.O.	5DO																																																																																																																																																	
110-120/AC - N.C.	5AC																																																																																																																																																	
110-120/AC - N.O.	5AO																																																																																																																																																	
220-240/AC - N.C.	2AC																																																																																																																																																	
220-240/AC - N.O.	2AO																																																																																																																																																	
Factory Fitted Options	Code																																																																																																																																																	
General Purpose NEMA-4 Pressure Switch ⁽³⁾	P																																																																																																																																																	
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7																																																																																																																																																	
Ex d ATEX Pressure Switch ⁽³⁾	P9																																																																																																																																																	
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn																																																																																																																																																	
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn																																																																																																																																																	
Single Limit Switch, General Purpose	S																																																																																																																																																	
Single Ex d Proximity limit Switch	S9																																																																																																																																																	
Double Ex d Proximity Limit Switch	SS9																																																																																																																																																	
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn																																																																																																																																																	
Pressure Gauge Assembly ⁽³⁾	6																																																																																																																																																	
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n																																																																																																																																																	
Monel Pressure Gauge Assembly	6m																																																																																																																																																	
Ex Proof NEC Class 1 Div 1 Solenoid	7																																																																																																																																																	
Ex. d Atex Solenoid	9																																																																																																																																																	
Stainless steel 316 Solenoid Valve	K																																																																																																																																																	
Drain Valve	DV																																																																																																																																																	
Water Motor Alarm Assembly ⁽³⁾	W																																																																																																																																																	
Special Elastomer	E ⁽⁴⁾																																																																																																																																																	
Large Control Filter	F																																																																																																																																																	
Valve Position Indicator	I																																																																																																																																																	
S.S Solenoid Valve	K																																																																																																																																																	
S.S 316 Trim Accessories	N																																																																																																																																																	
Pressure Transmitter ⁽³⁾	Q																																																																																																																																																	
Drain and Indicating Components	A																																																																																																																																																	
Tubing & Fittings	Code																																																																																																																																																	
Stainless Steel 316	NN																																																																																																																																																	
Monel 400	MM																																																																																																																																																	
Super Duplex	DD																																																																																																																																																	

Notes:

⁽¹⁾ Other materials available, see engineering data

⁽²⁾ Coated internally and externally

⁽³⁾ Supplied loose

⁽⁴⁾ Consult BERMAD for availability

Notes:

- ⁽¹⁾ Other materials available, see engineering data
⁽²⁾ Coated internally and externally
⁽³⁾ Supplied loose
⁽⁴⁾ Consult BERMAD for availability.

* NO or NC refers to the main valve status when the Solenoid is de-energized

* More options available - contact BERMAD



www.bermad.com

© Copyright 2013-2023 Bermad CS Ltd. All Rights Reserved. The information contained in this document is subject to change without notice. BERMAD shall not be liable for any errors contained herein. May 2023