

Flow Control and Pressure Reducing Valve

with Solenoid Control


IR-472-55-bKU

The BERMAD Model IR-472-55-bKU is a hydraulically operated, diaphragm actuated control valve that limits demand and reduces downstream pressure to constant preset maximum values. It either opens or shuts in response to an electric signal.



Features and Benefits

- Line Pressure Driven, Electrically Controlled On/Off
 - Limits fill-up rate and consumer over-demand
 - Protects downstream system
- Advanced Globe Hydro-Efficient Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
 - Excellent low flow regulation performance
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- Hydraulic Flow Sensor (upstream installation)
 - No moving parts
 - No need for flow straightening
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

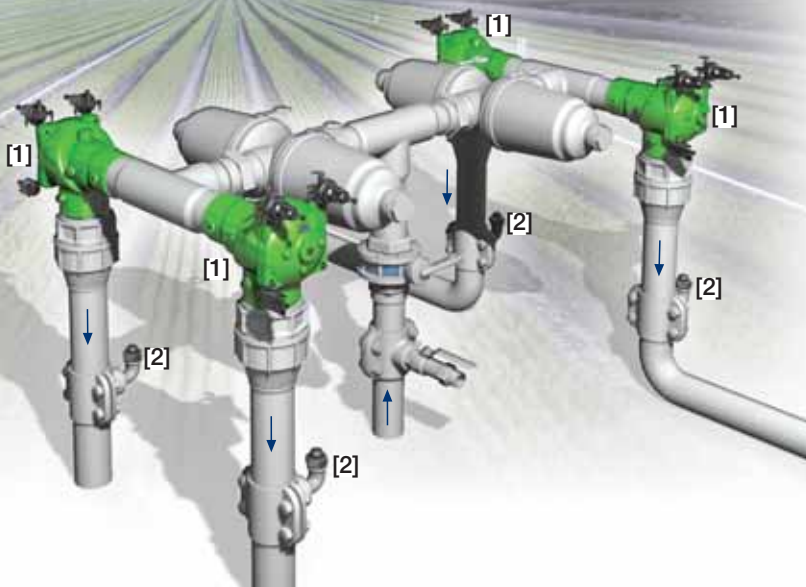


Typical Applications

- Computerized Irrigation Systems
- Remote and/or Elevated Plots
- Multiple Independent Consumer Systems
- Line Fill-Up Control Solutions
- Pressure Reducing Systems
- Distribution Centers

- [1] BERMAD Model IR-472-55-bKU opens in response to electric signal, limits over-demand, and controls laterals and distribution line fill-up, while reducing operating pressure.
- [2] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-472-55-bKU

For full technical details, refer to Engineering Section.

400 Series


Flow Control & Pressure Reducing

Technical Specifications

Dimensions and Weights

Pattern	Globe						Angle					
	Threaded						Fl.	Threaded				Fl.
Connections	40	50	65	80R	80	100	50	65	80R	80	100	
Size	DN	1½"	2"	2½"	3"	3"	2"	2½"	3"	3"	4"	
Lg	mm	153	180	210	210	255	320	N.A.	N.A.	N.A.	N.A.	N.A.
	inch	6	7.1	8.3	8.3	10.0	12.6	N.A.	N.A.	N.A.	N.A.	N.A.
La	mm	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	86	110	110	110	160
	inch	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	3.4	4.3	4.3	4.3	6.3
H	mm	87	114	132	140	165	242	136	180	178	184	223
	inch	3.4	4.5	5.2	5.5	6.5	9.5	5.4	7.1	7	7.2	8.8
C	mm	52	68	80	84	100	145	82	108	107	110	134
	inch	2	2.7	3.1	3.3	3.9	5.7	3.2	4.2	4.2	4.3	5.3
h	mm	29	39	45	53	55	112	61	93	91	80	112
	inch	1.1	1.5	1.8	2.1	2.2	4.4	2.4	3.7	3.6	3.1	4.4
A; B	mm	130	130	130	140	175	312	130	130	140	175	312
	inch	5	5	5	6	7	12.3	5.1	5.1	5.5	6.9	12.3
Weight	Kg	2	4	5.7	5.8	13	28	4.4	5.8	7	11	26
	lb.	4.4	8.8	12.6	12.8	28.7	61.7	9.7	12.8	15.4	24.3	57.3

The orifice assembly adds to valve length.

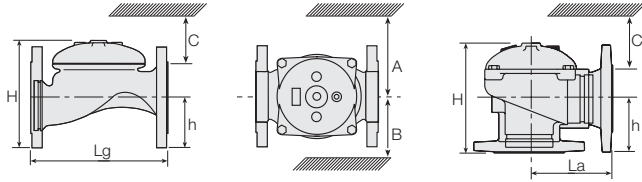

Technical Data

End connections:

Size	1½"	2"	2½"	3"	3"	4"
	DN40	DN50	DN65	DN80R	DN80	DN100
Threaded	Globe	■	■	■	■	■
	Angle					
Flanged	Globe		■	■	■	■
	Angle					
Grooved	Globe		■		■	■
	Angle					

Pressure Rating: 10 bar; 145 psi

Operating Pressure Range: 0.5-10 bar; 7-145 psi

For lower pressure requirements, consult factory

Setting Range: 1-7 bar; 15-100 psi


Setting ranges vary according to specific pilot spring. Please consult factory.

Flow Setting Range: ±20% from valve predetermined flow

Orifice diameter is calculated in accordance with desired ΔP at predetermined flow.

Although the standard calculated ΔP is 0.4 bar; 5.5 psi, the actual head loss is 0.2 bar; 2.8 psi.

Operation

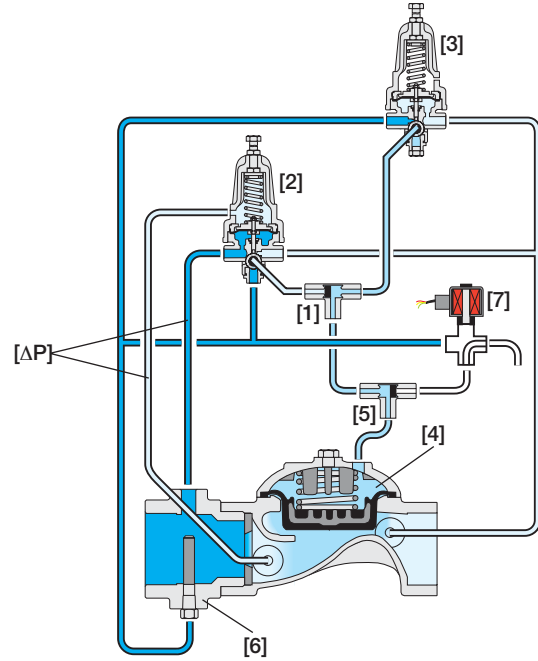

Shuttle Valve [1] (SV-1) hydraulically connects the Flow Pilot (FP) [2] or the Pressure Reducing Pilot (PRP) [3] to the Valve Control Chamber [4], through Shuttle Valve [5] (SV-5). Pressure Differential [ΔP] across the Orifice Assembly [6] is in direct proportion to demand. The FP, continuously sensing [ΔP], commands the Valve to throttle closed should demand rise above setting. The PRP commands the AMV to reduce Downstream Pressure [P2] to pilot setting. In response to an electric signal, the Solenoid [7] switches and pressurizes SV-5, which thereby directs line pressure into the control chamber, shutting the Valve.

Solenoid Voltage Range:

S-390 & S-400: 24 VAC, 24 VDC

S-392 & S-402: 9-20 VDC, Latch

S-982 & S-985: 12-50 VDC, Latch

Other voltages available.

For full electric data, refer to Accessories Section.

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Additional Feature	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage - Main Valve Position	Tubing & Fittings	Additional Attributes
IR	1½"-4"	472	55	-	G	I	BP	PG	4AC	PP	bKU
Other sizes available on request.											
Globe		G	BSP		BP	9VDC -	Latch	9DS		Servo	b
Angle		A	NPT		NP	12VDC -	Latch	1DS		Plastic Control Accessories	K
			ISO-16		16	24VDC -	N.C.	4DC		Orifice Assembly	U
			ISO-10		10	24VDC -	N.O.	4DC		Valve Position Indicator ⁽¹⁾	I
			IS 14 (ISO 10/4 Holes)		14	24VAC -	N.C.	4AC		Flow Stem ⁽¹⁾	M
			ANSI-125		A1	24VAC -	N.O.	4AO		(1) Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M.	
			JIS-10		J1	24VAC, Lightning Proof - N.C.		4RC		Other additional attributes are optional.	
			BST-D		BD	24VAC, Lightning Proof - N.O.		4RO		Please consult full-stop	
			Grooved		VI	Other electrical ratings are available.					
						Plastic Tubing & Fittings		PP			
						Plastic Tubing & Brass Fittings		PB			

For available end connections/sizes, see End Connections Table above.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD.

PC4AE72-55Kb 05